

RACK-2300

1U Server Chassis



RACK-2300B

Removable ACE-1010A 170W ATX power supply with PFC function

170W ATX Power Supply with PFC



RACK-2300W

PCI-2SD2 Backplane accepts two PCI cards

Specifications

- ◆ 1U Height Rackmount
- ◆ Support full size PICMG CPU board
- ◆ Accept two PCI add-on cards
- ◆ Drive space for one 5.25" Drive, one 3.5" FDD and one 3.5" HDD
- ◆ Equipped with ACE-1010A 170W ATX Power Supply with PFC function
- ◆ 3 x 4cm Fans for system cooling
- ◆ Vibration: 5-17Hz, 0.1" double amplitude displacement
17-640Hz, 1.5G acceleration peak to peak
- ◆ Shock: 10G acceleration peak to peak
- ◆ Depth: 548.2mm (21.58")
- ◆ Net/GW (kg): 8/13

Ordering Information


- RACK-2300[C]/PCI-2SD2/ACE-1010A
1U Server Chassis with PCI-2SD2 backplane
- [C]: Color Code: B= Black; W= White

RACK-2320

1U Embedded Chassis



RACK-2320B

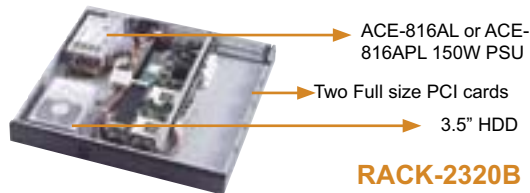

ACE-816AL or ACE-816APL 150W PSU

Two Full size PCI cards

3.5" HDD

RACK-2320B

Specifications

- ◆ 1U Height Rack-mount
- ◆ Support full-size PICMG CPU board
- ◆ Accepts two PCI add-on cards
- ◆ Drive space for one internal 3.5" HDD
- ◆ Equipped with ACE-816AL or ACE-816APL(with PFC) 150W power supply
- ◆ 3x4cm fans for system cooling
- ◆ Front panel equipped with one USB port
- ◆ Depth: 429mm(16.89")
- ◆ Net/GW (kg): 7/9

Ordering Information

- RACK- 2320 [Color] / [Backplane] / [Power Supply]
- B: Black W: White PCI-2SD2 ACE-816AL or ACE-816APL
- Contact Supplier About Other Power Supplies !

RACK-2330

1U Embedded Chassis



RACK-2330B

A78 2x20 LCD module



RACK-2330B

Specifications

- ◆ 1U Height Rack-mount
- ◆ With A78 2x20 characters LCD module with time clock and A106 alarm board to monitor temperature and Fans.
- ◆ Support full-size PICMG CPU board
- ◆ Accepts two PCI add-on cards
- ◆ Front panel equipped with one USB port
- ◆ Drive space for one internal 3.5" HDD
- ◆ Equipped with ACE-816AL or ACE-816APL(with PFC) 150W power supply
- ◆ 3x4cm fans for system cooling
- ◆ Depth: 429mm(16.89")
- ◆ Net/GW (kg): 6/9

Ordering Information

- RACK- 2330 [Color] / [Backplane] / [Power Supply]
- B: Black W: White PCI-2SD2 ACE-816AL or ACE-816APL
- Contact Supplier About Other Power Supplies !

RACK-2000

Advanced 2U Chassis



RACK-2000

Specifications

- ◆ EIA RS-310C 19" Standard Rackmount
- ◆ Front panel locking door system protects disk access and on/off power switches
- ◆ Plastic front panel
- ◆ Drive Bays: 1x3.5" FDD, 1x5.25" Drive, 2x3.5" HDD(internal)
- ◆ Cooling Fan: Two 8cm cooling fans with removable filter
- ◆ Standard Power Supply: ACE-832A 300W ATX power supply
- ◆ ACE-R30A 300W ATX Redundant power supply
- ◆ Supports power supply: PS/2 size AT/ATX power supply (ACE-93x/92x/916V/940AP, ACE-828 and ACE-832 series, ACE-840A, ACE-840AP-S, ACE-850AP)
- ◆ ACE-R30A 300W ATX Redundant power supply
- ◆ Optional Backplane: BP-5SD, IP-5SD3/5, PCI-5SD5-R2, PCI-5SDA, PCI-6SDA, PCIAGP-5SD, PX- 6SDA
- ◆ Accessory: Rack-mount slide: 24" or 30" (Optional)
- ◆ Vibration: 5-17Hz, 0.1 double amplitude displacement
17-640Hz, 1.5G acceleration peak to peak
- ◆ Shock: 10G acceleration peak to peak (11ms)
- ◆ Color: Black (PANTONE BLACK C), White (PANTONE 413C)
- ◆ Dimensions: 431(W) x 88(H) X 575(D)mm; (17" x 3.46" x 22.6")
- ◆ Net/GW (kg): 9/10

Ordering Information

Model	Power Supply	[C] Color Code :
RACK-2000 [C]	ACE-832A	B: Black W: White
RACK-2000 [C][R]	ACE-R30A/AP	[R]: Redundant power supply

Single Board Computer

LCD Product Series

Chassis

RACK-mount

Compact

Embedded

Barebone System

Power supply

Accessory