

17" Industrial Panel PC

PPC-5170A-H61

Intel® Core™ i7/ i5/ i3, Pentium® and Celeron® Processor

New

PPC-5170A/9455

Intel® Core™2 Duo Processor with Intel® 945G Platform



Features

- Intel® H61 Express Chipset with 2nd/3rd generation Intel® Core™, Pentium® and Celeron® processor
- High brightness TFT-LCD panel with LED backlight
- Multiple storage options: 2.5" SATA HDD, CF slot, and mSATA
- Dual Ethernet provides continuous network service and allows sharing among different workgroups in two different subnets
- Optional PCIe Mini 802.11b/g/n wireless module
- Optional PCI / PCIe by 1 expansion slot
- Optional Slim type CD-ROM drive bay
- Robust aluminum front bezel and metal casing
- IP 66 compliant front panel for PPC-5170A-H61
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (Over 4GB storage capacity)



Specifications

Model		PPC-5170A-H61		PPC-5170A/9455	
Display	LCD Size	17"			
	Max Resolution	1280(W) x 1024(H)			
	Brightness (cd/m ²)	350		300	
	Contrast Ratio	800 : 1			
	LCD Color	16.7M			
	Pixel Pitch (mm) (HxV)	0.264(H) x 0.264(V)			
	Viewing Angle (V/H)	170° / 160°		160° / 160°	
	Backlight MTBF (hrs)	50000			
Touch	Touch screen	Resistive Type 5-Wire with RS-232 interface		Resistive Type 5-Wire with RS-232 interface	
	Touch controller	DMC 9000		DMC 9000	
Motherboard	SBC	POS-H61		POS-9455	
	CPU	2nd/3rd Generation Intel® Core™ i7/ i5/ i3, Pentium® and Celeron® processor		LGA 775 Socket with Intel® Core™2 Duo, Celeron® D with 533/800/1066 MHz	
	Chipset	Intel® H61		Intel® 945G + ICH7R	
	RAM	Two 204-pin DDR3 SO-DIMM slots (Max. 16G)		Two 240-pin DIMM socket, supporting DDR2 400/533/667MHz modules (Max. 4G)	
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0		Realtek RTL8111CP GbE controller	
	Audio Codec	Realtek ALC662 audio codec		Realtek ALC888 audio codec	
I/O Ports and Switches		4 x RS-232 COM Port	1 x Audio (Line-out, MIC-in)	4 x RS-232	2 x PS/2 mouse and keyboard interface
		1 x RS-232/422/485 Port	2 x SFP Fiber LAN	1 x RS-232/422/485 Port	1 x Power Switch
		2 x RJ-45 for LAN Port	1 x Power Switch	2 x RJ-45 for LAN Port	1 x AT / ATX Switch
		4 x USB 2.0, 2 x USB 3.0 on rear	1 x AT / ATX Switch	4 x USB 2.0	1 x LPT
		1 x VGA Port	1 x PCI/PCIe Slot	1 x VGA Port	1 x CMOS reset button
Drive Bay	HDD Driver Bay	1 x 2.5" SATA HDD bay with anti-shock			
	SSD	CF Type II, mSATA		CF Type II	
	CD-ROM Driver Bay	SATA Slim Type CD-ROM Bay			
Expansion Slot		Either 1 x PCI slot or 1 x PCIe slot		Either 1 x PCI or PCIe x1 expansion slot (PCI riser card built-in, optional PCIe x1 riser card)	
		1 x PCIe Mini card		1 x PCIe Mini card	
Physical	Construction Front Panel	Aluminum		Aluminum Die-casting	
	Chassis Construction	Heavy-duty Steel		Heavy-duty steel (SECC)	
	Mounting	Panel, Wall, Rack, Stand and Arm VESA 100mm x 100mm			
	Front Panel Color	Silver (Pantone 8001C)			
	Dimensions (WxHxD) (mm)	452 x 356 x 115		452 x 356 x 115	
	Cut Out Dimensions (WxH) (mm)	426 x 331		425 x 331	
	Net /Gross Weight	8 Kg / 12 Kg			
	IP Rating	Front IP66 Compliant		Front IP 65 Compliant	
Environment	Operation Temperature	-20°C ~ 60°C		-10°C~50°C	
	Storage Temperature	-30°C ~ 70°C		-20°C~60°C	
	Vibration	5~17Hz, 0.1 double amplitude displacement 17~640Hz 1.5G acceleration peak to peak			
	Shock	10G acceleration part to part (11ms)			
Power Supply	AC Input	AC Input ATX power supply - P/N: 63000-ACEA622A166-RS - 220W power supply - Input: 90VAC~264VAC, 50/60Hz - Output(max.): 3.3V@14A, 5V@16A, 12V@10A, -12V@0.8A		P/N: 63000-ACEA618APPC-RS -180W Power Supply - Input: 90VAC~264VAC, 50/60Hz - Output (max.): 3.3A@14A, 5V@16A, 12V@14A, -12V@0.5A	
	DC Input	DC Input ATX power supply - P/N: ACE-4520C-RS - 200W power supply - Input: 24 VDC(18~36 VDC) - Output(max.): 3.3V@12A, 5V@12A, 12V@15.4A, -12V@0.5A		P/N: ACE-4520C-RS -200W power supply -Input: 24 VDC(18~36 VDC) -Output(max.): 3.3A@12A, 5V@12A, 12V@15.4A, -12V@0.5A	

1

IEI Mobile Solutions

2

Automation Panel Solutions

3

RISC-based Solutions

4

PACSmate Medical Solutions

5

Optional Peripherals

Ordering Information

Part No.	Description	
Intel® H61 Platform	PPC-5170A-H61-P/R-R10	17" 350 cd/m ² SXGA Panel PC with POS-H61, Pentium Dual Core G6xxT (Above 2.2GHz), TDP 35W, 2GB DDR3 RAM*2, Silver color, PSU ACE-A622A, touch screen, RoHS
	PPC-5170AD-H61-P/R-R10	17" 350 cd/m ² SXGA Panel PC with POS-H61, Pentium Dual Core G6xxT (Above 2.2GHz), TDP 35W, 2GB DDR3 RAM*2, Silver color, PSU ACE-4520C, touch screen, RoHS
	PPC-5170A-H61-i3/R-R10	17" 350 cd/m ² SXGA Panel PC with POS-H61, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 RAM*2, Silver color, PSU ACE-A622A, touch screen, RoHS
	PPC-5170AD-H61-i3/R-R10	17" 350 cd/m ² SXGA Panel PC with POS-H61, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 RAM*2, Silver color, PSU ACE-4520C, touch screen, RoHS
	PPC-5170A-H61-i5/R-R10	17" 350 cd/m ² SXGA Panel PC with POS-H61, Core i5 Dual Core 2xxxTCPU (Above 2.7GHz), TDP 35W, 2GB DDR3 RAM*2, Silver color, PSU ACE-A622A, touch screen, RoHS
	PPC-5170AD-H61-i5/R-R10	17" 350 cd/m ² SXGA Panel PC with POS-H61, Core i5 Dual Core 2xxxTCPU (Above 2.7GHz), TDP 35W, 2GB DDR3 RAM*2, Silver color, PSU ACE-4520C, touch screen, RoHS
Intel® 945G Platform	PPC-5170A-R11/9455-E2160/A622A/T-R/1GB	17" 300 cd/m ² SXGA panel PC with POS-9455 R11 version, Pentium® Dual-Core E2160 1.8GHz CPU, 1GB DDR2 RAM, Silver color, PSU ACE-A622A, touch screen, RoHS
	PPC-5170A-R11/9455-E2160/4520C/T-R/1GB	17" 300 cd/m ² SXGA panel PC with POS-9455 R11 version, Pentium® Dual-Core E2160 1.8GHz CPU, 1GB DDR2 RAM, Silver color, PSU ACE-4520C, touch screen, ,RoHS
Riser Card	PCIR-01H-R10	1-Slot PCI riser card
	PCIER-101H-R10	1-Slot PCIe x 1 riser card

Packing List

Item	Part No.	Description
SATA CD-ROM Cable	32803-000300-100-RS	SLIMLINE SATA 7+6 P TO SATA 7P /4P POWER , L=200/150mm.
Power Cord	32000-000002-RS	EUROPEAN Standard ,1830MM, PLUG(16A 250V), CONNECTOR (10A 250V)
Panel Mount Kit	19Z00-000024-RS	
Wall Mount Kit	41020-016102-00-RS	
IEI One Key Recovery CD	IEI-7B000-000478-RS	
Touch Pen		
User's Manual CD-ROM		

IQ Mounting Options

Item	Part No.
Rack Mount Kit	RK-170MS-R10 (for PPC-5170A series)
	WIDSRK-170MS-R10 (for WIDS-517A series)
ARM	ARM-31-RS
STAND	STAND-210-R11

Options

Part Number	Description
19Z00-000112-RS	IDE CD-ROM Installation Kit (W/O IDE cable)
41019-0393C0-00-RS	IDE HDD Bracket
32200-000037-RS	25cm HDD IDE Cable
PPC-WL-KIT02-R10	Wi-Fi module with RF cable and antenna, 2T2R, 802.11 b/g/n for PPC-5150A-H61, PPC-5170A-H61
73400-AD7760H01-RS	Slim type SATA DVD-ROM

1

IEI Mobile Solutions

2

Automation Panel Solutions

3

RISC-based Solutions


4

PACSmate Medical Solutions


5

Optional Peripherals

PPC-5170A Dimensions (Unit: mm)

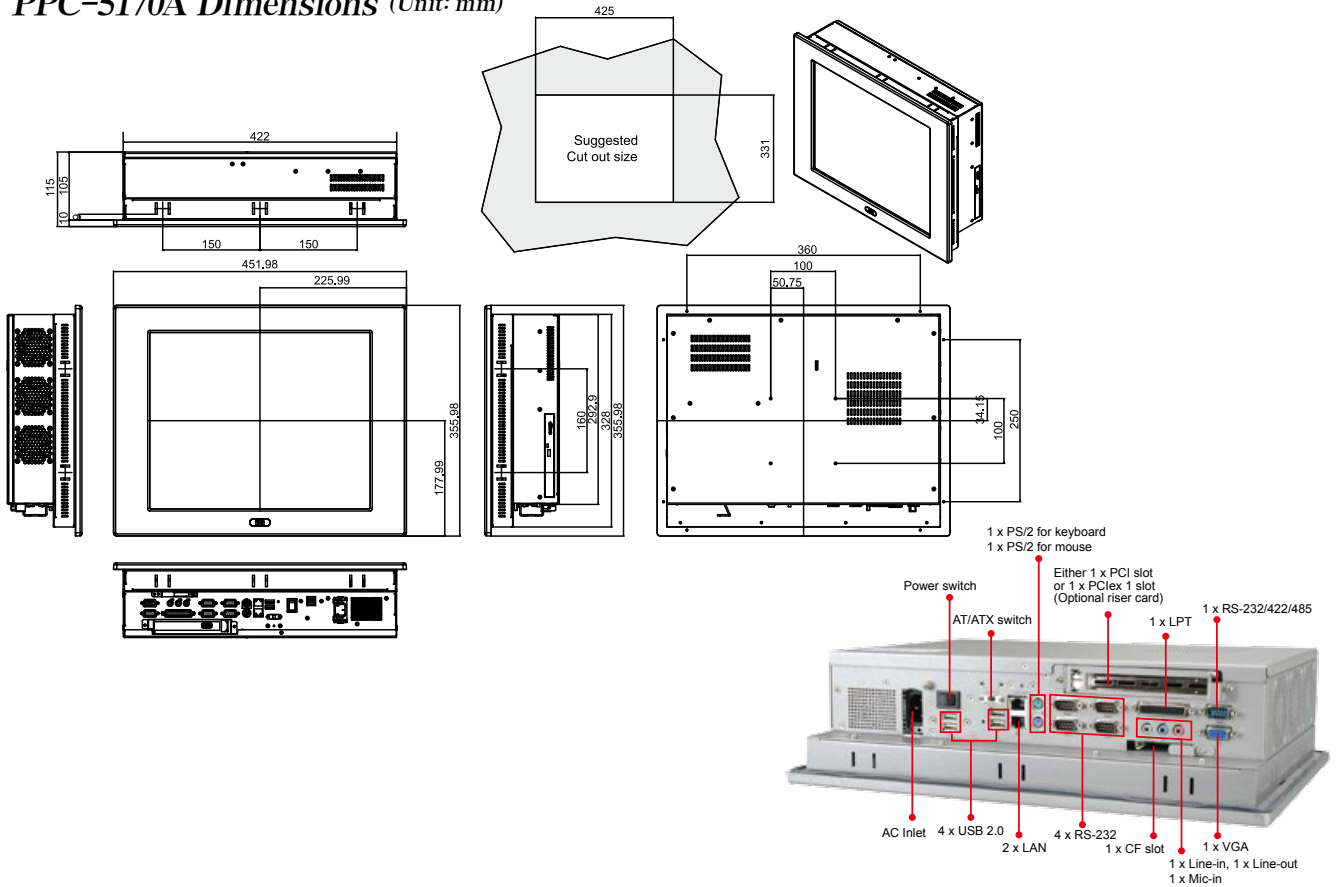

PPC-5170A-H61 Dimensions (Unit: mm)

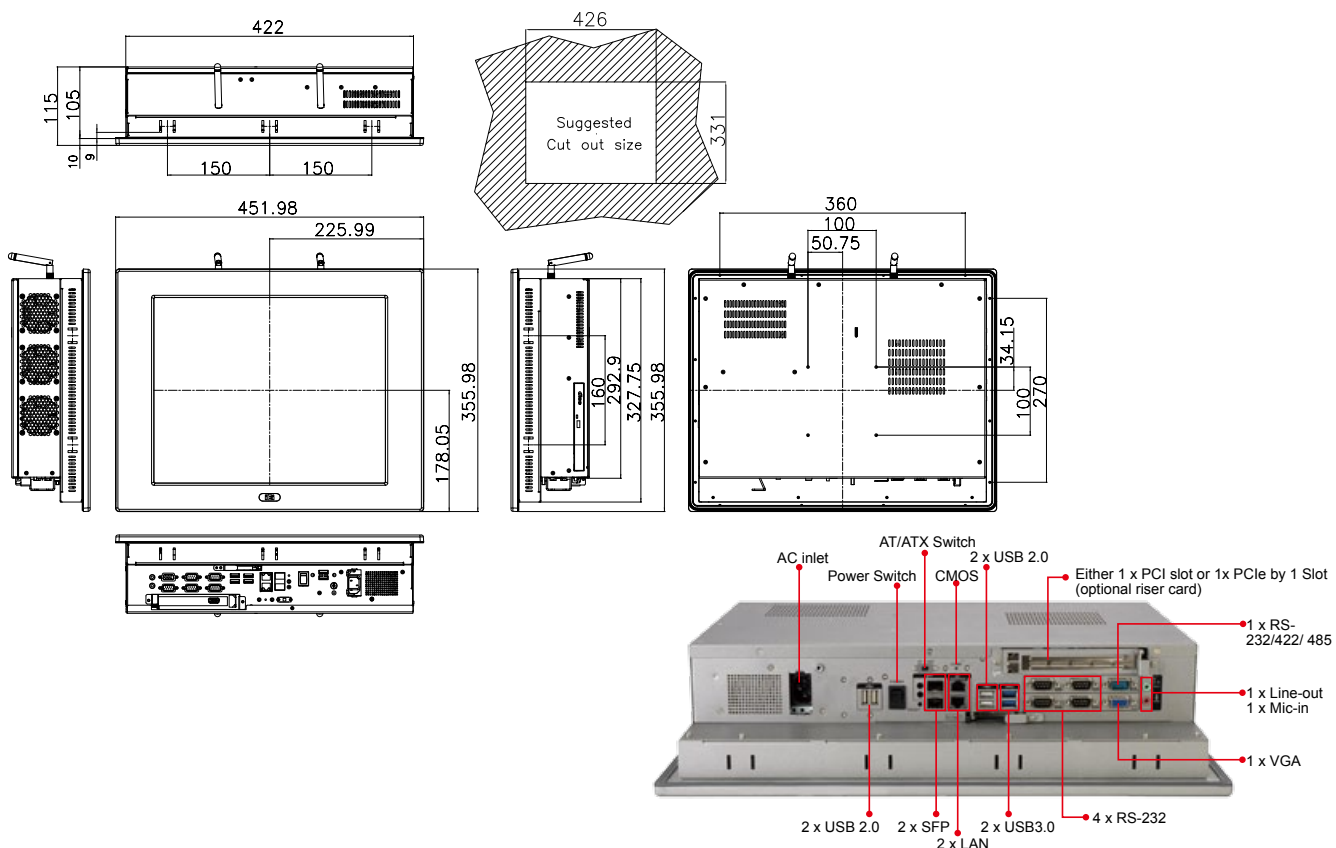

- 1 IEI Mobile Solutions
- 2 Automation Panel Solutions
- 3 RISC-based Solutions
- 4 PACSmate Medical Solutions
- 5 Optional Peripherals