

# TANK-101B-D525-N455

Fanless Embedded Controller with Dual-Core Intel® Atom™ D525 Processor



## Features

- Dual-core Intel® Atom™ D525 processor inside
- Wide range 9 V~36 V DC power input
- Isolation protected COM and CAN communication
- Extended temperature fanless design supports -20°C ~ 70°C (N455)



The TANK-101B is designed with all the functions and protections compliant with the targeting transport market. It not only provides dual-core computing power delivered by the Intel® Atom™ D525, its onboard memory with CompactFlash®/SATA DOM solid-state storage can withstand severe operating environments. With typical voltage at 24 V DC, the TANK-101B can take wide range DC input from 9 V to 36 V as power source. It also has COM port and CAN bus with isolation protection for device control, dual Realtek GbE LAN and 802.11b/g/n for high speed communication. The TANK-101B supports all these versatile functions in a compact enclosure in addition to fanless operation.

## Isolation Protection

An integrated circuit (IC) connected to external ports is susceptible to damaging electrostatic discharge (ESD) pulses from its operating environment and peripherals. Additional protection can violate stringent signaling requirements, leaving design engineers with the need to balance performance and reliability.

**COM3 : RS-422/485**  
Default RS-422 with isolation  
1. On-board 15KV ESD Protection  
2. Isolated 3000 V DC Protection

**LAN1 with ASF 2.0 support**

**Wide Range Power Input: 9 V~36 V DC**

**Power Jack**

**Reset**

**Isolated CAN :**  
The Control Area Network (CAN) is a serial bus system originally developed by Bosch for use in automobiles, and is now increasingly used in industrial automation. IEI TANK-101B has built-in on-board CAN controllers. The IEI CAN provides bus arbitration and error detection with an automatic transmission repeat function. This drastically reduces the chance of data loss, ensures system reliability and is suitable for networking intelligent I/O devices such as sensors or actuator of machines or plants. On-board optical isolators along with additional protection design protect your system and equipment against damage from ground loops and electrostatic discharge (ESD), which increases system reliability in harsh environments.

**Alert Standard Format (ASF 2.0) is also supported to provide system manageability in OS-absent environments. The ASF defines remote control and alerting interface that serve managed PCs in OS-absent states. The ASF capability can minimize on-site IT maintenance, improve system availability, and allow remote control of power management.**

**12 V/24 V DC power supply**

**Power adapter**

**VGA**


**Dual USB 2.0**

**Mic-in**

**Speaker-out**


**CompactFlash®**

## Dual-core Intel® Atom™ D525

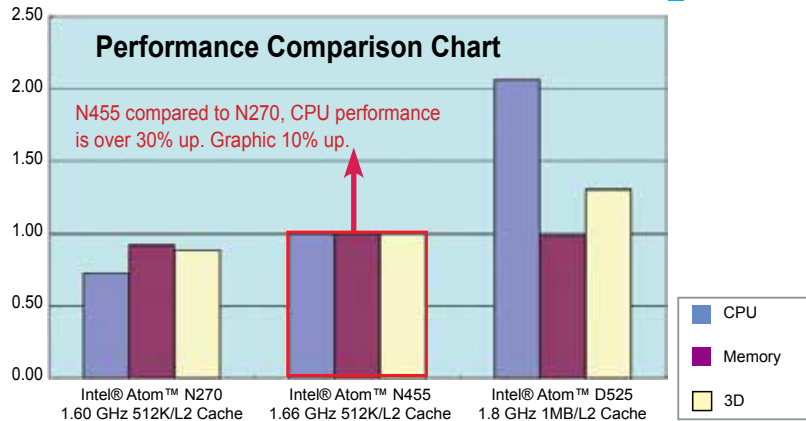

CAN Controller	Philips SJA1000T
CAN Transceiver	TI ISO1050DUBR
Signal Support	CAN_H, CAN_L
Speed (bps)	1Mbps
Connectors	Two DB-9 connectors
Isolated Protection	2500Vrms on CAN side

Dimensions (Unit: mm)

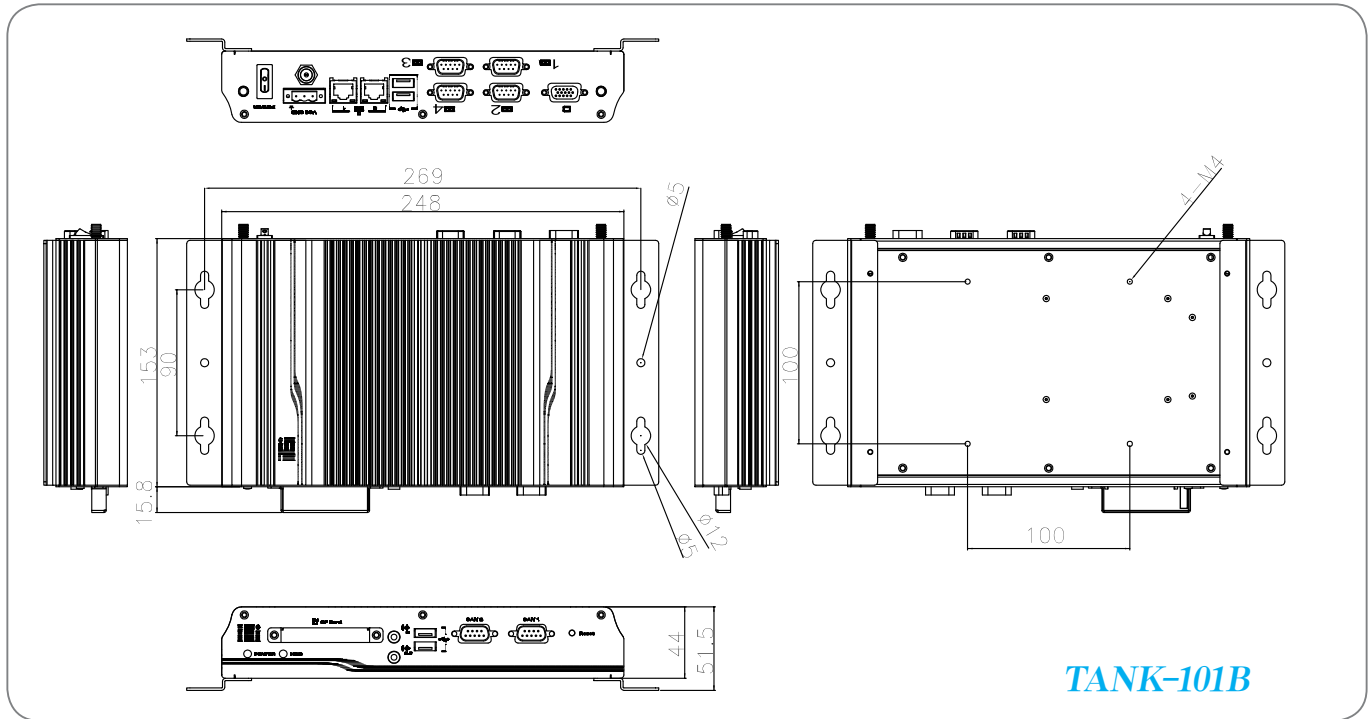

Specifications

Model Name		TANK-101B
Chassis	Color	Cool Gray+Blue
	Dimensions (WxDxH) (mm)	248 x 138 x 44
	System Fan	Fanless
Chassis Construction		Aluminum alloys with heavy duty metal
Motherboard	CPU	Intel® Atom™ D525 1.8 GHz Intel® Atom™ N455 1.66 GHz
	Chipset	Intel® ICH8M
System Memory		On-board DDR3 1 GB memory 1 x 204-pin DDR3 SDRAM SO-DIMM (system max: 3 GB)
Storage	Hard Drive	1 x 2.5" SATA 3Gb/s HDD/SSD bay
	CF Card/CFast	1 x CF Type II
System Function	USB 2.0	4
	Ethernet	2 x RJ-45 PCIe GbE by Realtek 8111E
	COM Port	3 x RS-232 (DB-9) 1 x RS-422/485 (DB-9, Default RS-422 with isolation)
	CAN Bus	2 x DB-9 CAN with isolation
	Display	1 x VGA
	Resolution	VGA: Up to 2048 x 1536@60Hz
	Audio	1 x Line-out, 1 x Mic-in
	Wireless	1 x 802.11b/g/n (optional)
Expansions	PCIe Mini	1 x Full size
Power	Power Input	DC Jack: 9 V~36 V DC
	Power Consumption	12 V@1.85 A (Intel® Atom™ D525 with DDR3 1 GB)
Reliability	Mounting	Din-rail, wall mount
	Operating Temperature	-20°C~60°C (D525 with air flow CF/SSD), 5% ~ 95%, non-condensing -20°C~70°C (N455 with air flow CF/SSD), 5% ~ 95%, non-condensing
	Operating Shock	Half-sine wave shock 3G, 11ms, 3 shocks per axis
	Operating Vibration	MIL-STD-810F 514.5C-1 with SATA HDD MIL-STD-810F 514.5C-2 with CompactFlash®/SSD
	Weight (Net/Gross)	2.1 kg/3.9 kg
	Safety/EMC	CE/FCC
OS	Supported OS	Microsoft® Windows® XP Embedded

Ordering Information

Part No.	Description
TANK-101B-R11/D525/1GB	Extended tempeture fanless embedded system with dual-core Intel® Atom™ Processor D525 1.8 GHz CPU with two isolated CAN, one isolated serial port, 1 GB DDR3 memory on board, 9 V~36 V DC in, Pantone 287C + Cool Gray 2C, -20°C ~ 60°C, RoHS
TANK-101B-R11/N455/1GB	Extended tempeture fanless embedded system with Intel® Atom™ Processor N455 1.66 GHz CPU with two isolated CAN, one isolated serial port, 1 GB DDR3 memory on board, 9 V~36 V DC in, Pantone 287C + Cool Gray 2C, -20°C ~ 70°C, RoHS

Packing List

1 x Power cord
1 x 60W 12 V power adapter (Meet PSE & ErP)
2 x Wall mount brackets
1 x Screw set
1 x SATA HDD drive cable
1 x One Key Recovery CD
1 x Driver CD
1 x QIG



Wall mount brackets